

Product information sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Besteco

Supplier's address: Besteco S.R.O, Uvalska 34, Prague 10, Czech Republic

Model identifier: MSC120X70

Type of light source: LED


Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	No cap-type		
Mains or non-mains:	NMLS	Connected light source (CLS):	no
Colour-tuneable light source:	no	Envelope:	no
High luminance light source:	no		
Anti-glare shield:	no	Dimmable:	no

Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

General product parameters:

Energy consumption in on-mode (kWh/1 000 h), rounded up to the nearest integer	24	Energy efficiency class	E
Useful luminous flux (Φ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	3067 lm in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4000K
On-mode power (P_{on}), expressed in W	24	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0.00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI- values that can be set	89.7
Outer dimensions (⌀) (⌀) without separate control gear, lighting control parts and non- lighting control parts, if any (millimetre)	Height	4000	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	8mm	
	Depth	5mm	
Claim of equivalent power (⌀)	no	If yes, equivalent power (W)	no
		Chromaticity coordinates (x and y)	0,3815, 0,3752



Parameters for directional light sources:

Peak luminous intensity (cd)	-	Beam angle in degrees, or the range of beam angles that can be	120
------------------------------	---	--	-----


Parameters for LED and OLED light sources:

R9 colour rendering index value	62	Survival factor	≥ 0.9
the lumen maintenance factor	≥ 0.96		

Parameters for LED and OLED mains light sources:

displacement factor (cos ϕ 1)	-	Colour consistency in McAdam ellipses	-
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	-	Stroboscopic effect metric (SVM)	-

Spectrum Test Report

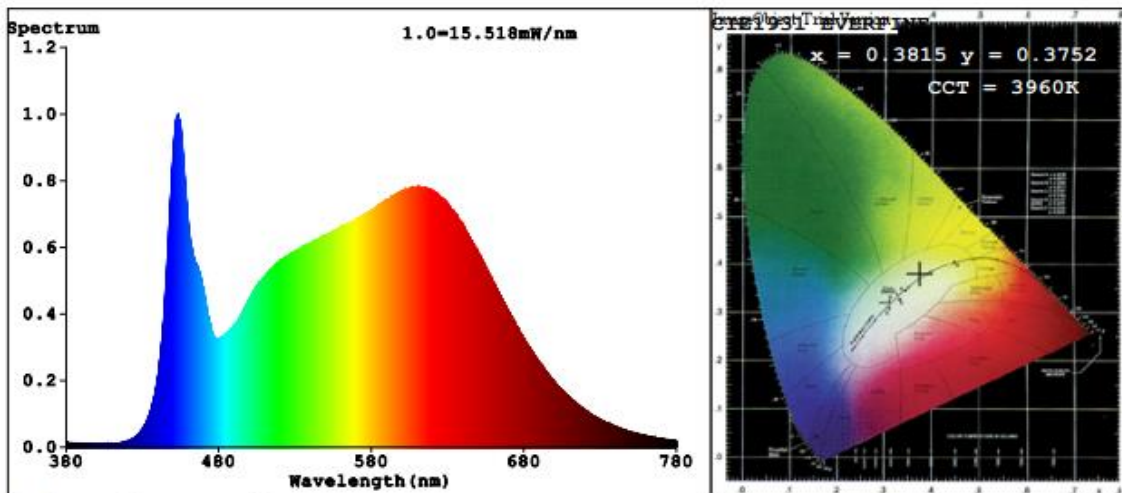

Color Parameters:

Chromaticity Coordinate: $x=0.3815$ $y=0.3752$ $u'=0.2264$ $v'=0.5010$
 CCT=3960K (Duv=-0.0010) Dominant WL:Ld =579.8nm WL:Lc = --nm Purity=27.1%
 Ratio:R=20.0% G=75.6% B=4.4% Peak WL:Lp=453.5nm FWHM=23.2nm
 Render Index:Ra=92.9 CRI=89.7

R1 =94 R2 =98 R3 =98 R4 =92 R5 =92 R6 =94 R7 =92
 R8 =84 R9 =62 R10=93 R11=92 R12=70 R13=95 R14=99 R15=91

Photo Parameters:

Flux = 724.2 lm Eff. : 129.42 lm/W Fe = 2.426 W

Electrical parameters:

V = 11.997 V I = 0.4664 A P = 5.595 W PF = 1.000

LEVEL:OUT WHITE:ANSI_4000K

Status: Integral T = 1696 ms Ip = 45073 (69%)

GBT5702

X
 2DCC